


**JETCOAT®**


# PROFESSIONAL GRADE PREMIUM RUBBERIZED FOUNDATION & ROOF COATING




**POLYMER-MODIFIED ASPHALT EMULSION  
FOR SUPERIOR WATERPROOFING**

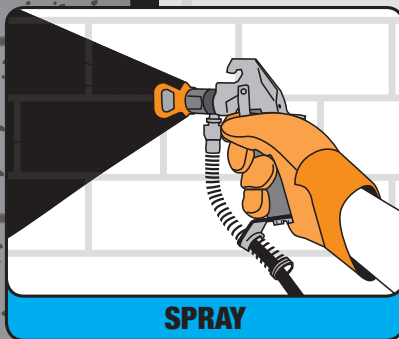

**SPRAY**

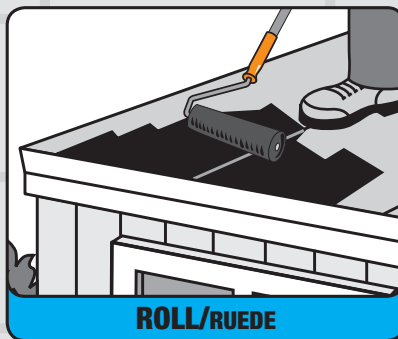

**ROLL/RUEDE**

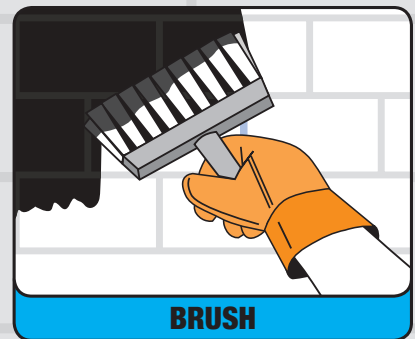

**BRUSH**


**Environmentally  
Friendly Formulation**

- Liquid Rubber Membrane Seals & Water-proofs Concrete, Wood, Foamboard, Roofs, & More
- Superior Resiliency and Flexibility - Over 300% Elongation
- ZERO VOC Advanced Water-Based Technology
- Bridges Small Cracks


**Dries Black**

# PROFESSIONAL GRADE PREMIUM RUBBERIZED FOUNDATION & ROOF COATING


JETCOATinc.com



SPRAY



ROLL/RUEDE



BRUSH

## DESCRIPTION:

An elastomeric polymer modified asphalt emulsion designed for coating most roof surfaces and concrete foundations. Protects concrete foundations and most roof surfaces from moisture and water intrusion. Dries black.

## IDEAL FOR:

- Most Roof Surfaces
- Waterproofing
- Exterior Basement Walls (Concrete)
- Polystyrene/Styrofoam Insulation Board
- Poured Concrete Walls
- Foam
- Wood
- & Other Surfaces

## DIRECTIONS:

Surface shall be clean, dry and free of any dirt or contaminants. Application temperature must be a minimum of 60°F and rising. Do not apply when temperature is expected to drop below 50°F within a 24 hour period. Be sure to wear eye protection and gloves when mixing and applying this product. In areas where dew or fog accumulates in the early evening, it is best to coat in the morning. Stop coating by early afternoon (3:00 pm) to prevent wash off, which will occur if dew, fog, or rain arrives before coating dries. Do not apply if rain is imminent or forecast within 24 hours of application. Apply using either a brush, trowel, or airless spray unit (suggested tip size .021 to .025). Apply material at a rate of 150 square feet per 4.75 gallon pail. Allow material to dry and cure for 24 hours prior to application of foam or drainage boards or backfilling. Clean tools with water immediately after use.

## COVERAGE:

Approximately 150 square feet per 4.75 gallon pail at 60 mils thickness.

## DRYING TIME:

Allow 24 hours depending on weather conditions.

Property	ASTM Test Method	Result
<b>Liquid Requirements</b> (Table 1)		
Viscosity @ 73.4°F, ku	D562	90-110 ku
Solids Content %	D2697	50-65%
<b>Film Properties</b> (Table 2)		
Initial Elongation @ 73°F, %	D2370	>300%
Permeance (60 mil film, 73.4°F/50% RH, Inverted), perms	D1653	<1.0
Wet Adhesion to Galvanized Metal, pli	C794/D903	6.0
Standard Practice for Resistance to Wind-Driven Rain for Exterior Coatings on Masonry	D6904	PASS
Standard Test Method for Water Penetration and Leakage Through Masonry	E 514-05c	PASS
Standard Test Method for Field Determination of Water Penetration of Masonry Wall Surfaces	C1601	PASS

## Manufactured by:

JETCOAT  
472 S. Brehl Avenue  
Columbus, Ohio 43223  
1-800-394-0047

